2.3 AB-6I

Isophonic pipe clamp M6

Coating	Base Materials		
Yellow zinc plated	Steel Piping	Copper Piping	Plastic Piping

Installation data

Code	Ø A[mm]	Ø A (“)	A x B (mm)	Recommended Load (kg)
AB6I012	12	1/4	10,6 x 0,9	70
AB6I015	15	--	10,6 x 0,9	70
AB6I016	16	3/8	10,6 x 0,9	70
AB6I018	18	--	10,6 x 0,9	70
AB6I022	22	1/2	10,6 x 0,9	70
AB6I026	26	3/4	10,6 x 0,9	70
AB6I028	28	--	10,6 x 0,9	70
AB6I035	35	1	11,5 x 1,1	70
AB6I042	42	1 1/4	11,5 x 1,1	100
AB6I048	48	1 1/2	11,5 x 1,1	100
AB6I054	54	--	11,5 x 1,1	100
AB6I060	60	2	11,5 x 1,1	100

Characteristics

- For piping from Ø8 to Ø 63 mm.
- Surface finish: Yellow zinc plated ≥ 5 microns.
- Steel profile, 0.9÷1.1 mm thick.
- Lateral opening for all diameters, for faster installation.
- Encased M6 nut.
- Installation temperature: -30ºC ÷ +120ºC.
- EPDM rubber for isolation and noise / vibration reduction.
- Compliant with the Technical Building Code (TBC), HS and HR Basic Requirements sections.
- Suitable for steel and plastic piping.
- Suitable for gas, sanitary and electrical installations, etc.

DRAWING

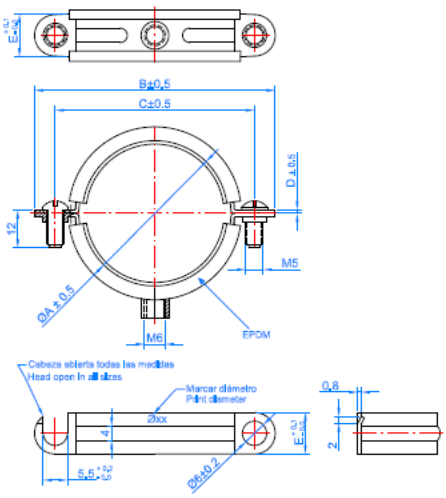

APPLICATION EXAMPLES